

CXT® manufactures precast concrete restroom, shower, concession, and multipurpose buildings for use in parks, recreational areas, and education facilities throughout the United States and Canada.

Cheyenne - 26' x 30' Two Multiuser Fully Accessible Restrooms with Four Separate Shower Rooms


Four Separate Shower Rooms





Navajo - 20' x 26' Four Family Assist Flush Restrooms with Showers












Rainier - 10'6" x 23'

Two Fully Accessible Restrooms with Showers



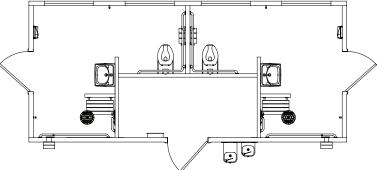






Pioneer - 10'6" x 12'
Single User Fully Accessible Restroom with Shower







## > Simple to Install

Minimal site preparation is required and buildings can typically be in use on the day of installation.

## > Ready to Use

Prefabricated and delivered complete and ready to use, including plumbing and electrical where applicable.

## > Easy to Maintain

Interiors are designed to resist abusive wear and can be quickly cleaned with warm soapy water and a brush.

CXT buildings are delivered to your site ready to use and require minimal site preparation. Our structures are manufactured with high-strength precast concrete floors, walls, and roofs and can withstand extreme conditions caused by flood, snow, wind, and zone-4 seismic loads.

Utilities are pre-wired, pre-plumbed, and tested before shipment to ensure local code requirements are met.

Water, sewage and electrical utility lines are stubbed up through the prepared base material to match up with the utility blockout within the floor of the chase area. Hook up of the utility lines can be completed in a matter of hours.

All utility lines are concealed within the chase/ storage area for easy hook up and maintenance, and to reduce vandalism.

## Cooperative Contracts

GSA Contract #47QSWA23D009W E&I Cooperative Services Contract #CR001294 Sourcewell Contract #052725-CXT TIPS Contract #240202





- 800.696.5766
- sales@lbfoster.com
- www.cxtinc.com